




TEXOUT®
OPATEX PRO

manufactured by
SICEN INDUSTRIES

Dirello
ITALIAN OUTDOOR DESIGN

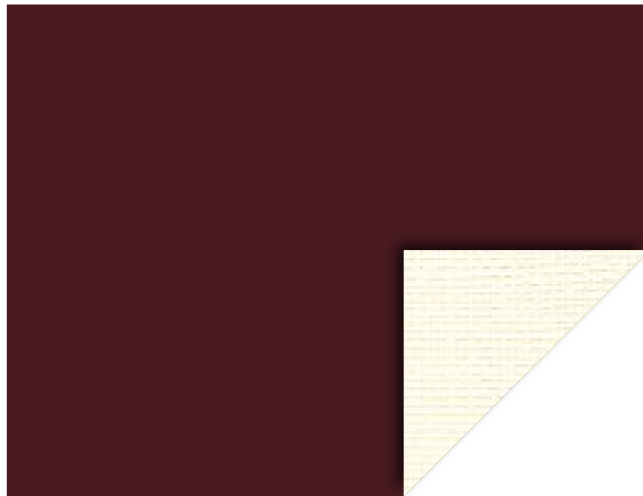

444 ext. Bordeaux / int. Champagne
Gtot int: 0,50 Gtot ext: 0,07



632 ext. Verde / int. Champagne
Gtot int: 0,45 Gtot ext: 0,06



815 ext. Antracite / int. Champagne
Gtot int: 0,42 Gtot ext: 0,04



819 ext. Taupe / int. Champagne
Gtot int: 0,45 Gtot ext: 0,06



878 ext. Grigio / int. Champagne
Gtot int: 0,44 Gtot ext: 0,05



877 ext. Grigio scuro / int. Grigio chiaro
Gtot int: 0,44 Gtot ext: 0,05

	IT	EN	FR
Utilizzi / Applications / Applications	Consigliato per pergole	Recommended for pergolas	Recommandé pour pergolas
Filato / Yarn / Fil	ordito/trama: poliestere 1100 Dtex	warp/weft: polyester 1100 Dtex	chaîne/trame: polyester 1100 Dtex
Costruzione / Construction / Contexture	ordito: 8 fili/cm trama: 8 fili/cm	warp: 8 yarns/cm weft: 8 yarn/cm	chaîne: 8 fils/cm trame: 8 fils/cm
Spessore / Thickness / Épaisseur	0,68 mm	0,68 mm	0,68 mm
Peso tessuto / Weight / Poids (ISO 2286/2)	ca 850 g/m ²	ca 850 g/m ²	ca 850 g/m ²
Ignifugazione / Flammability / Ignifugation	CL.2 (IT) M2 (FR) Euroclasse (B-s2, d0)	CL.2 (IT) M2 (FR) Euroclasse (B-s2, d0)	CL.2 (IT) M2 (FR) Euroclasse (B-s2, d0)
Finissaggio / Finish / Finition	lato esterno: laccato opaco con vernice PU lato interno: laccato opaco goffrato. Impermeabile	outer side: matt PU lacquered inner side: matt lacquered with embossing. Waterproof.	côté externe: laqué opaque avec vernis PU côté interne: laqué opaque gaufré. Imperméable.
Resistenza alla trazione / Tensile strenght / Résistance á la traction (EN ISO 1421)	ordito: ca 250 DaN/5 cm trama: ca 250 DaN/5 cm	warp: ca 250 DaN/5 cm weft: ca 250 DaN/5 cm	chaîne: ca 250 DaN/5 cm trame: ca 250 DaN/5 cm
Resistenza allo strappo / Tear strenght / Résistance á la déchirure (DIN 53363)	ordito: ca 25 DaN trama: ca 20 DaN	warp: ca 25 DaN weft: ca 20 DaN	chaîne: ca 25 DaN trame: ca 20 DaN
Resistenza alla luce / Light fastness / Tenue á la lumière (ISO 105-B02)	livello 7/8	level 7/8	niveau 7/8
Resistenza alle temperature / Temperature resistance / Résistance á la temperature	+70° C / -30° C	+70° C / -30° C	+70° C / -30° C
Aderenza / Adhesion / Adherence (ISO 2411)	ca 10 DaN/5 cm	ca 10 DaN/5 cm	ca 10 DaN/5 cm
Altezza tessuto / Roll height / Hauteur	300 cm	300 cm	300 cm
Lunghezza rotolo / Roll lenght / Longueur de la pièce	ca 60 m ca 250 m (su richiesta)	ca 60 m ca 250 m (upon request)	ca 60 m ca 250 m (sur demande)

I dati tecnici possono subire variazioni a seconda dei lotti di produzione e sono soggetti a tolleranza di $\pm 5\%$.
The a.m. technical data can vary according to production lots and are subject to a $\pm 5\%$ tolerance.
Les donnés techniques peuvent varier selon le lot de fabrication et son sujettes à une tolérance de $\pm 5\%$.



PVC SPALMATO
PVC COATED



BILACCATO
DOUBLE SIDE
LACQUERED



IGNIFUGO
FIRE RETARDANT



IMPERMEABILE
WATERPROOF



BLOCKOUT
BLOCKOUT



ASPETTO TESSILE
TEXTILE
APPEARANCE



DOUBLE FACE



REACH



Dirello

ITALIAN OUTDOOR DESIGN

dirello.com