




PRECONTRAI
622 BLOCKOUT

manufactured by
Serge Ferrari

Dirello
ITALIAN OUTDOOR DESIGN


PRECONTRAIT 622 BLOCKOUT

manufactured by
Serge Ferrari




503 Bianco
Gtot int: 0,32 Gtot ext: 0,01

lucido
glossy



020 Vaniglia
Gtot int: 0,35 Gtot ext: 0,02

lucido
glossy

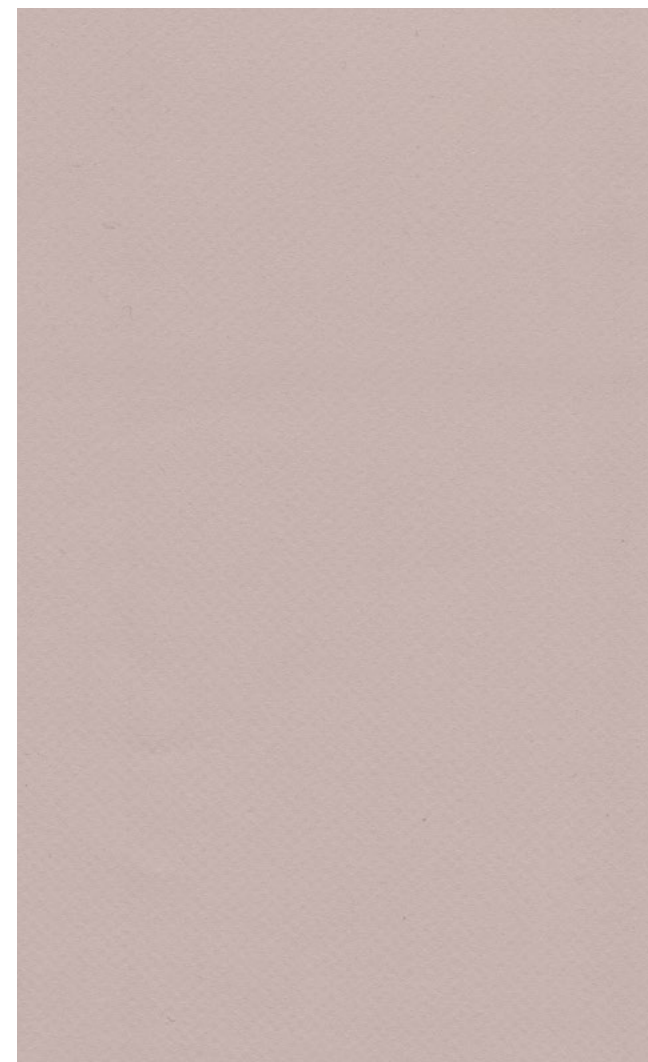

597 Sabbia
Gtot int: 0,39 Gtot ext: 0,04

opaco
matt

PRECONTRAIT 622 BLOCKOUT

manufactured by
Serge Ferrari

	IT	EN	FR
Utilizzi / Applications / Applications	Consigliato per pergole	Recommended for pergolas	Recommandé pour pergolas
Filato / Yarn / Fil	ordito: PES HT 1100 Dtex trama: PES HT 1100 Dtex	warp: PES HT 1100 Dtex weft: PES HT 1100 Dtex	chaîne: PES HT 1100 Dtex trame: PES HT 1100 Dtex
Spalmatura / Coating / Enduction	PVC	PVC	PVC
Costruzione / Construction / Contexture	ordito: 8 fili/cm trama: 8 fili/cm	warp: 8 yarns/cm weft: 8 yarn/cm	chaîne: 8 fils/cm trame: 8 fils/cm
Spessore / Thickness / Épaisseur	0,65 mm	0,65 mm	0,65 mm
Peso tessuto / Weight / Poids (ISO 2286-2)	ca 750 g/m ²	ca 750 g/m ²	ca 750 g/m ²
Ignifugazione / Flammability / Ignifugation	CL. 2 (IT: RF 1/75 e 3/77) M2 (FR) NFPA 701 (US) B1 (DE: DIN 4102-1)	CL. 2 (IT: RF 1/75 e 3/77) M2 (FR) NFPA 701 (US) B1 (DE: DIN 4102-1)	CL. 2 (IT: RF 1/75 e 3/77) M2 (FR) NFPA 701 (US) B1 (DE: DIN 4102-1)
Finissaggio / Finish / Finition	Laccato 2 lati PVDF. Saldabile.	Both side lacquered PVDF. Weldable.	Laqué biface PVDF. Saudable.
Resistenza alla trazione / Tensile strenght / Résistance à la traction (EN ISO 1421)	ordito: ca 230 DaN/5 cm trama: ca 220 DaN/5 cm	warp: ca 230 DaN/5 cm weft: ca 220 DaN/5 cm	chaîne: ca 230 DaN/5 cm trame: ca 220 DaN/5 cm
Resistenza allo strappo / Tear strenght / Résistance à la déchirure (DIN 53363)	ordito: ca 20 DaN trama: ca 20 DaN	warp: ca 20 DaN weft: ca 20 DaN	chaîne: ca 20 DaN trame: ca 20 DaN
Resistenza alla luce / Light fastness / Tenue à la lumière (XENON TEST ISO 105-B02)	livello 8/8	level 8/8	niveau 8/8
Resistenza alle temperature / Temperature resistance / Résistance à la temperature	+70° C / -30° C	+70° C / -30° C	+70° C / -30° C
Aderenza / Adhesion / Adhèrence (ISO 2411)	ca 9 DaN	ca 9 DaN	ca 9 DaN
Altezza tessuto / Roll height / Hauteur	250/267 cm opaco 267 cm lucido	250/267 cm matt 267 cm glossy	250/267 cm matt 267 cm brillant
Lunghezza rotolo / Roll lenght / Longueur de la pièce	50 m	50 m	50 m

I dati tecnici possono subire variazioni a seconda dei lotti di produzione e sono soggetti a tolleranza di $\pm 5\%$.
The a.m. technical data can vary according to production lots and are subject to a $\pm 5\%$ tolerance.
Les données techniques peuvent varier selon le lot de fabrication et son sujettes à une tolérance de $\pm 5\%$.



PVC SPALMATO
PVC COATED



BILACCATO
DOUBLE-SIDE LAC



IGNIFUGO
FIRE RETARDANT



IMPERMEABILE
WATERPROOF



BLOCKOUT
BLOCKOUT



REACH

TEXYLOOP®

100% RICICLABILE TEXILOOP
100% RECYCLABLE TEXILOOP



Dirello

ITALIAN OUTDOOR DESIGN

dirello.com