




SUNVISION

manufactured by
DICKSON[®]
innovative textiles for your world

Dirello
ITALIAN OUTDOOR DESIGN

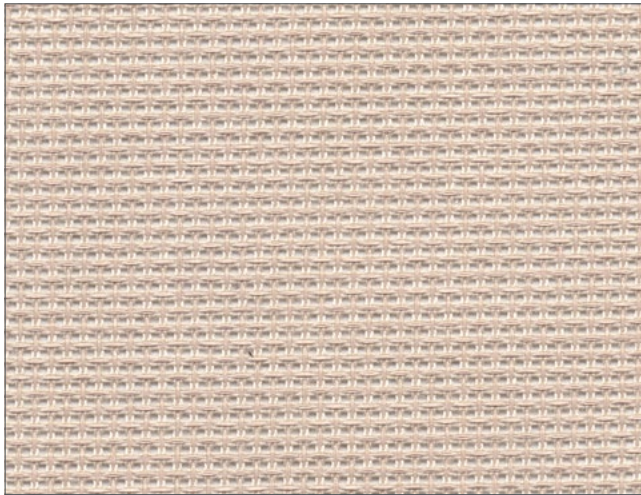


SV 8859 Nature

Gtot int: 0,44 Gtot ext: 0,21




SV 8860 Ecrû

Gtot int: 0,39 Gtot ext: 0,23

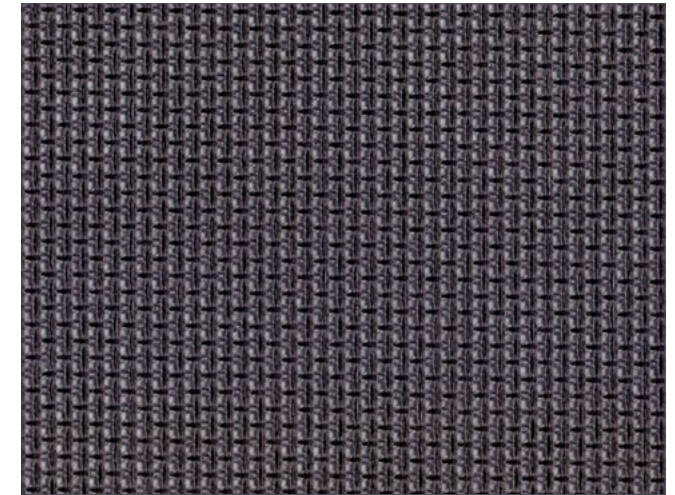


SV 8873 Ardoise

Gtot int: 0,53 Gtot ext: 0,15

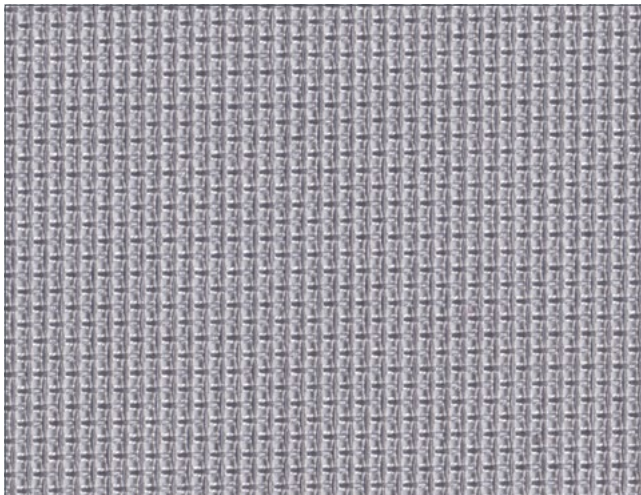


SV 8876 Perle

Gtot int: 0,47 Gtot ext: 0,21

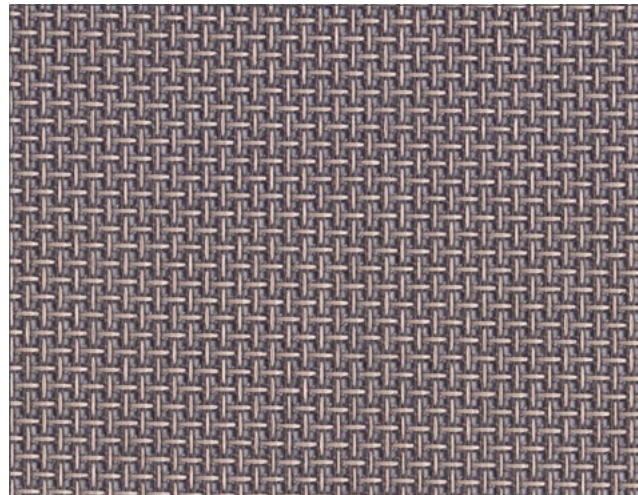

SV U346 Grey

Gtot int: 0,50 Gtot ext: 0,16

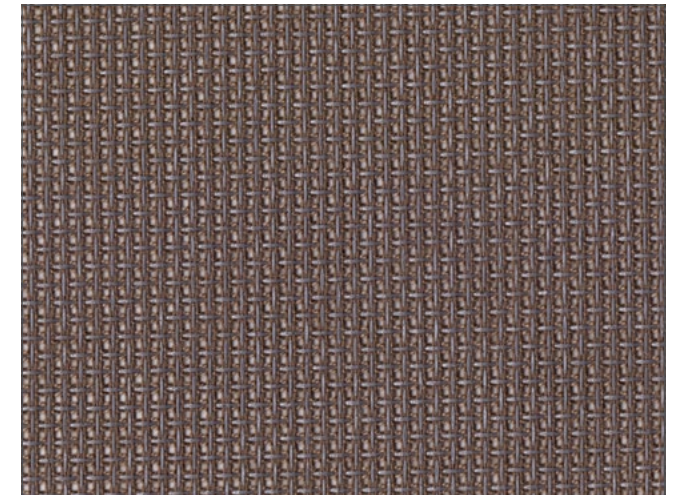

SV U350 Cocoa

Gtot int: 0,50 Gtot ext: 0,18

	IT	EN	FR
Utilizzi / Applications / Applications	Consigliato per chiusure laterali, pergole	Recommended for lateral closing, pergolas	Recommandé pour fermetures latéral, pergolas
Composizione / Composition / Composition	Filo in poliestere ad alta tenacità rivestito in PVC e filo acrilico tinto massa	High tenacity polyester PVC coated and solution dyed acrylic	Fil polyester haute ténacité enduit PVC et fil acrylique teint masse
Spalmatura / Finish / Finition	Trattamento Cleangard speciale per tende antisporcio e impermeabilizzante	Cleangard special dirt-resistance and awning water repellent treatment	Traitement Cleangard spécial store anti salissures et imperméabilisant
Armature / Armor / Armure (ISO 2286-3)	Tela	Canvas	Toile
Spessore / Thickness / Épaisseur (ISO 2286-3)	0,74 mm	0,74 mm	0,74 mm
Peso tessuto / Weight / Poids (NF EN ISO 2286-1)	275 g/m ²	275 g/m ²	275 g/m ²
Resistenza alla rottura / Tensile strenght / Résistance à la rupture (ISO 13934-1)	ordito: 80 DaN trama: 80 DaN	warp: 80 DaN weft: 80 DaN	chaîne: 80 DaN trame: 80 DaN
Resistenza allo strappo / Tear strenght / Résistance à la déchirure (ISO 13937-1)	ordito: 6,5 DaN trama: 5 DaN	warp: 6,5 DaN weft: 5 DaN	chaîne: 6,5 DaN trame: 5 DaN
Allungamento alla rottura / Elongation at break / Allongement à la rupture (ISO 13934-1)	23%	23%	23%
Solidità della tinta agli UV / Colour fastness UV / Solidité coloris UV (ISO 105 B02)	7-8 classe 8	7-8 class 8	7-8 class 8
Solidità tinta alle intemperie / Colour fastness weather condition / Solidité coloris intemperies (ISO 105 B04)	4-5 classe 5	4-5 class 5	4-5 class 5
Resistenza alle temperature / Temperature resistance / Résistance à la temperature	+70° C / -30° C	+70° C / -30° C	+70° C / -30° C
Altezza tessuto / Roll height / Hauteur (EN 1773)	125 cm / 250 cm	125 cm / 250 cm	125 cm / 250 cm
Lunghezza rotolo / Roll lenght / Longueur de la pièces	50 m	50 m	50 m

Proprietà solari e luce / Solaris and light properties / Propriétés solaires et lumière (EN 14501)

Cod. colore	SV 8859 Nature	SV 8860 Ecrú	SV 8873 Ardoise	SV 8876 Perle	SV U346 Grey	SV U350 Cocoa
TS	29,0%	34,0%	16,4%	29,1%	16,8%	20,1%
RS	40,3%	58,0%	9,5%	30,0%	22,7%	21,7%
AS	30,7%	8,0%	74,1%	40,9%	60,5%	58,1%
TV	27,1%	33,0%	15,5%	29,1%	14,9%	14,7%
PUV	80%	75%	85%	80%	85%	85%

TS: Trasmissione solare in % / Solar Transmission (%) / Transmission Solaire (%) | **RS:** Riflessione solare in % / Solar Reflection (%) / Réflexion Solaire en % | **AS:** Assorbimento solare in % / Solar Absorption / Absorption Solaire en % | **TV:** Trasmissione visiva in % / Visible transmission (%) / Transmission Visible% | **PUV:** Protezione UV in % / Protection UV % / Protection en UV %

I dati tecnici possono subire variazioni a seconda dei lotti di produzione e sono soggetti a tolleranza di ±5%.

The a.m. technical data can vary according to production lots and are subject to a ± 5% tolerance.

Les données techniques peuvent varier selon le lot de fabrication et son sujettes à une tolérance de ±5%.



Dirello

ITALIAN OUTDOOR DESIGN

dirello.com