



SUNWORKER OPEN

manufactured by
DICKSON[®]
innovative textiles for your world

Dirello
ITALIAN OUTDOOR DESIGN


SUNWORKER OPEN

manufactured by
DICKSON[®]
innovative textiles for your world



SWN M005 White

Gtot int: 0,38 Gtot ext: 0,22

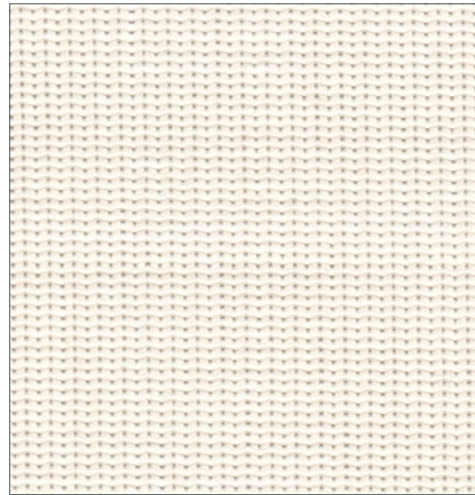


SWN M006 Pearl

Gtot int: 0,40 Gtot ext: 0,22




SWN M392 Charcoal

Gtot int: 0,55 Gtot ext: 0,19

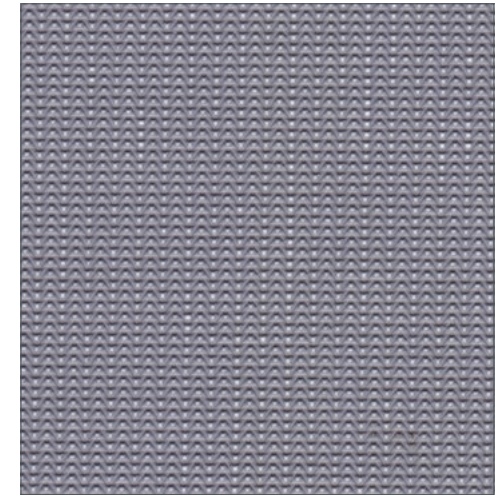


SWN M652 Silver

Gtot int: 0,50 Gtot ext: 0,17

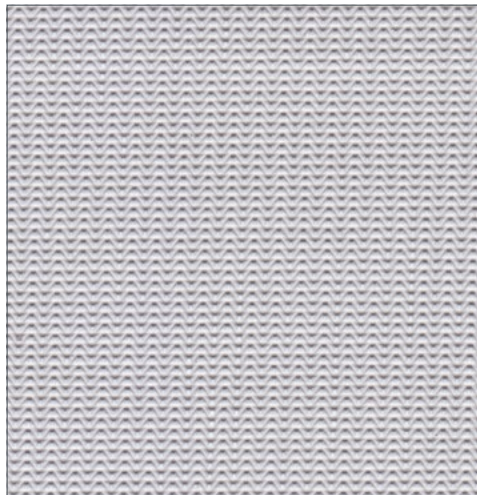


SWN M654 Grey

Gtot int: 0,44 Gtot ext: 0,19

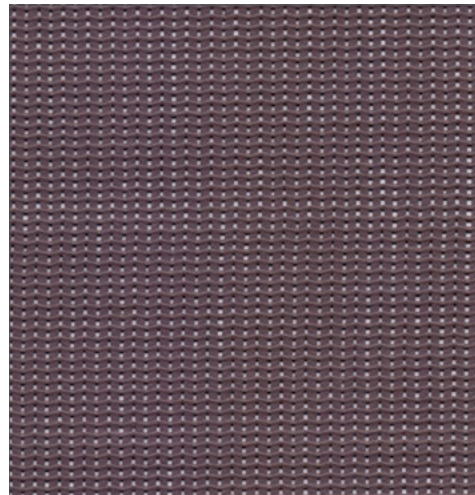


SWN M715 Bison

Gtot int: 0,54 Gtot ext: 0,15

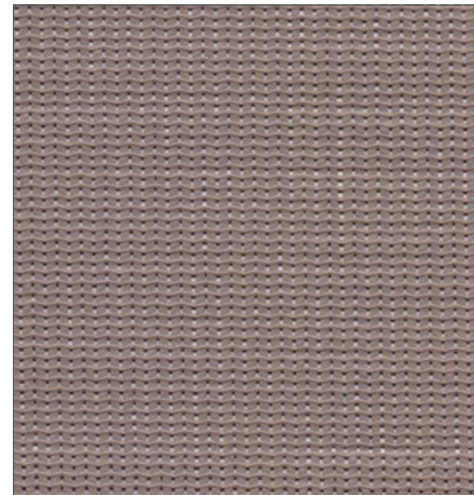

SWN M719 Taupe

Gtot int: 0,51 Gtot ext: 0,17

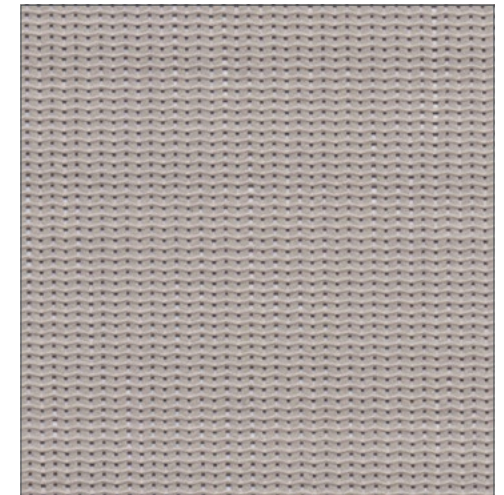

SWN M939 Elephant

Gtot int: 0,48 Gtot ext: 0,16

SUNWORKER OPEN

manufactured by
DICKSON
innovative textiles for your world

	IT	EN	FR					
Utilizzi / Applications / Applications	Consigliato per chiusure laterali	Recommended for lateral closing	Recommandé pour fermetures latéral					
Composizione / Composition / Composition	100% poliestere alta tenacità	100% high tenacity polyester	100% polyester haute ténacité					
Spalmatura / Finish / Finition	PVC plastisol tinto massa	PVC coating on both sides	PVC biface					
Armatura / Armure / Armor	Rachel trameur	Rachel trameur	Rachel trameur					
Spessore / Thickness / Épaisseur (ISO 2286-3)	0,55 mm	0,55 mm	0,55 mm					
Peso tessuto / Weight / Poids (NF EN ISO 2286-1)	360 g/m ²	360 g/m ²	360 g/m ²					
Ignifugazione / Flammability / Ignifugation	M2 (NF P 92 503)	M2 (NF P 92 503) B1 (DIN 4102)	M2 (NF P 92 503) B1 (DIN 4102)					
Resistenza alla rottura / Tensile strenght / Résistance à la rupture (ISO 13934-1)	ordito: 260 DaN trama: 180 DaN	warp: 260 DaN weft: 180 DaN	chaîne: 260 DaN trame: 180 DaN					
Resistenza allo strappo / Tear strenght / Résistance à la déchirure (DIN 53.363)	ordito: 50 DaN trama: 30 DaN	warp: 50 DaN weft: 30 DaN	chaîne: 50 DaN trame: 30 DaN					
Allungamento alla rottura / Elongation at break / Allongement à la rupture	ordito: 23% trama: 23%	warp: 23% weft: 23%	chaîne: 23% trame: 23%					
Solidità tinta alle intemperie / Colour fastness weather condition / Solidité coloris intemperies	4/5 class/5 (ISO 105 B04)	4/5 class/5 (ISO 105 B04)	4/5 class/5 (ISO 105 B04)					
Resistenza alle temperature / Temperature resistance / Résistance à la température	+70° C / -30° C	+70° C / -30° C	+70° C / -30° C					
Altezza tessuto / Roll height / Hauteur (EN 1773)	305 cm	305 cm	305 cm					
Coefficiente d'apertura / Openess factor / Coefficient d'ouverture (EN 14500)	15%	15%	15%					
Effetto arco/ Bow effect / Ecart Angulaire (NFG 07-163)	2%	2%	2%					
Lunghezza rotolo / Roll lenght / Longueur de la pièce	30 ml	30 ml	30 ml					
Performance termiche e visive / / Performances thermiques et visuelles (EN 410 / 14500 / 14501 / 13363-1)								
Cod. colore	SWN M005 White	SWN M006 Pearl	SWN M392 Charcoal	SWN M 652 Silver	SWN M 654 Grey	SWN M 715 Bison	SWM M 719 Taupe	SWN M 939 Elephant
TE / PE / AE	0,32 / 0,6 / 0,08	0,31 / 0,53 / 0,16	0,18 / 0,06 / 0,76	0,17 / 0,23 / 0,6	0,24 / 0,42 / 0,34	0,14 / 0,09 / 0,77	0,17 / 0,20 / 0,63	0,17 / 0,29 / 0,54
TV / PV / AV	0,31 / 0,68 / 0,01	0,27 / 0,55 / 0,18	0,18 / 0,06 / 0,76	0,16 / 0,26 / 0,58	0,22 / 0,47 / 0,31	0,14 / 0,09 / 0,77	0,16 / 0,20 / 0,64	0,16 / 0,32 / 0,52
T UV	0,17	0,15	0,18	0,15	0,15	0,14	0,15	0,15
TE: Trasmissione energetica / Solar transmission / Transmission énergétique PE: Riflessione energetica / Solar reflection / Réflexion énergétique AE: Assorbimento energetico / Solar absorption / Absorption énergétique TV: Trasmissione visiva / Visual transmission / Transmission visuelle PV: Riflessione visiva / Visual reflection / Réflexion visuelle AV: Assorbimento visivo / Visual absorption / Absorption visuelle T UV: Trasmissione UV / UV transmission / Transmission UV								

I dati tecnici possono subire variazioni a seconda dei lotti di produzione e sono soggetti a tolleranza di ±5%.
The a.m. technical data can vary according to production lots and are subject to a ± 5% tolerance.
Les données techniques peuvent varier selon le lot de fabrication et son sujettes à une tolérance de ±5%.





Dirello

ITALIAN OUTDOOR DESIGN

dirello.com